Preparation of polarization entangled mixed states of two photons

Chuanwei Zhang

D

We propose a sch
via controlled locatic
optical fibers, and m

PACS numbers: 03.67.

arXiv:quant-ph/0107145v2 21 Nov 2003

Entanglement has played a cr
cations of quantum informatio
portation [1], superdense codin
rection [3], etc. To function
tions requires maximal pure ent
wanted coupling to the environ
of quantum systems and yields m
Therefore entanglement conce
and various applications of m
[9, 10, 11] are very important ar
by many authors. Experimental
"decoherence-free subspace" [12
and optical Werner states have

In this paper, we propose a sc
trary polarization-entangled mi
via controlled decoherence. In t
strating decoherence-free subsp
posed by coupling polarization m
of photons. Here we introduc
gling polarization modes with lo
where location modes are final
them with appropriate path le
tecting coincidences independen
ton pair from photon source.

Consider a two-qubit mixed state ρ of quantum system AB, it can be represented as [14]

$$\rho = \sum_{i=1}^{4} p_i \left|\psi_i\right\rangle_{AB} \left\langle\psi_i\right|, \qquad (1)$$

where $0 \leq p_i \leq 1$, $\sum_{i=1}^{4} p_i = 1$, and $p_i \geq p_j$ for $i \leq j$. $\left|\psi_i\right\rangle_{AB}$ are two-qubit pure states with same entanglement of formation (EOF) as ρ. Therefore $\left|\psi_i\right\rangle$ are same up to some local unitary operations [15], i.e. $\left|\psi_i\right\rangle = U_i \otimes V_i \left|\Phi\right\rangle$, where U_i and V_i are local unitary operations and $\left|\Phi\right\rangle = \cos\theta \left|00\right\rangle + \sin\theta \left|11\right\rangle$ with $0 \leq \theta \leq \pi/4$.

The experimental arrangement for our scheme is described as Fig.1. First, spontaneous parametric down-conversion in two adjacent β-barium borate (BBO) crystals produces initial two photons polarization-entangled pure state $\left|\Phi\right\rangle_{AB} = \cos\theta \left|HH\right\rangle + \sin\theta \left|VV\right\rangle$ [16, 17], where $\left|H\right\rangle$ and $\left|V\right\rangle$ are horizontal and vertical polarizations respectively. Then six beam splitters with variable transmission coefficients (VBS) couple the initial polarization state $\left|\Phi\right\rangle_{AB}$ to location modes and each photon has four possible optical paths $i_{A(B)}$. At each path,

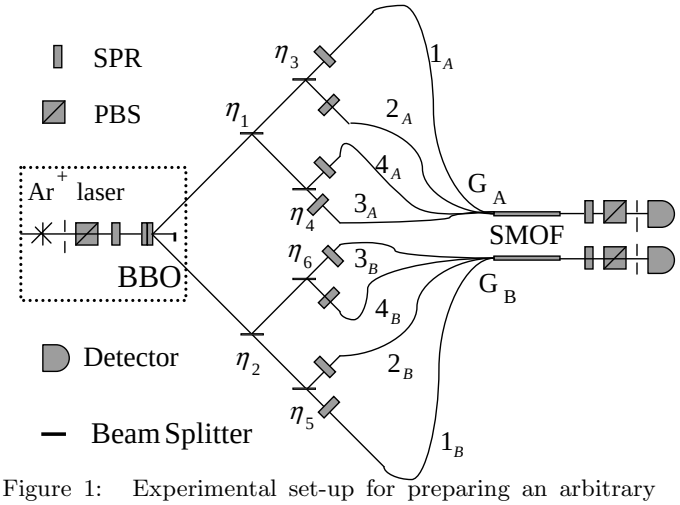

Figure 1: Experimental set-up for preparing an arbitrary polarization-entangled mixed state of two photons.

single-qubit polarization rotations (SPR) perform local unitary operations U_i, V_i on the polarization mode of each photon and transform initial entangled state $\left|\Phi\right\rangle_{AB}$ to different $\left|\psi_i\right\rangle_{AB}$. The four paths of each photon mix on couplers $G_{A(B)}$ and become one through single-mode optical fibres [18]. In experiment, lossless mixture process can be realized by using a fast switch to combine different modes, in addition to a pulsed pump laser. However, this method is not very practical although it can be implemented in principle. A practical replacement can be a passive coupler without switch although it will decrease the optimal success probability due to losses in the coupling. Denote $L_i^{A(B)}$ as the optical path lengths of paths $i_{A(B)}$ (from the BBO crystal to coupler $G_{A(B)}$). If $L_i^{A(B)}$ satisfy $L_i^A = L_i^B$ and $\Delta_{ij}^{A(B)} = \left|L_i^{A(B)} - L_j^{A(B)}\right| \gg l_{coh}$ for different i and j, the location modes will be traced out and we obtain a mixed state, where l_{coh} is the single-photon coherence length.

The mixed state still contains information of the location modes since photons from different paths i will arrive at the detector at different time. Therefore the mixed state is composed by two discrete subspace state: two photons A, B arriving at same time and at different time. If the time window of the coincidence counter is small enough, only photons from paths with same lengths (i_A and i_B) contribute the counts and the polarization states of photons are reduced to the subspace state with

same arrival time. In this subspace, the state is the two-qubit mixed state ρ. Therefore the final SI each arm, along with PBS, enable analysis of the p ization correlations in any basis, allowing tomogr reconstruction of the density matrix [4, 12, 17].

In our scheme, we require that the coherence le of pump laser is much smaller than path length d ence Δ_{ij} in order to avoid two-photons interferenc [18], two-photons interference can be used to real Franson-type test of Bell inequalities, where the length difference is 2 orders of magnitude smaller the coherence length of the pump laser. In our sch we require that the path length difference is larger both single photon and pump laser coherence lengths to avoid both single and two photons interference. In this case, the travel time of a photon pair from laser to detector enables to resolve the different paths in principle. It is therefore important to post-select only photons arriving in coincidence but not to resolve the travel time from emission to detection in order to trace out all location modes.

The VBS in the scheme can be implemented using a one-order Mach-Zehnder interferometer [19, 20] and it transforms location modes in the following way

$$|a\rangle_{initial} \rightarrow \sqrt{\eta_i}\,|a\rangle_{final} + \sqrt{1-\eta_i}\,|b\rangle_{final}\,, \qquad (2)$$

where $|a\rangle$ and $|b\rangle$ are the location modes and $\sqrt{\eta_i}$ are the transmission coefficients. The $SPR_i^{A(B)}$ at paths $i_{A(B)}$ can be constructed with wave plate sequences {QWP, HWP, QWP} [20] and they perform unitary operation $U_i^A(V_i^B)$. The coupler $G_{A(B)}$ introduces decoherence, which yields mixed state

$$\rho_0 = \sum_{i,j=1}^{4} p_{ij} U_i \otimes V_j\,|\Phi\rangle\langle\Phi|\,U_i^\dagger \otimes V_j^\dagger, \qquad (3)$$

where p_{ij} is the combined probability with photons A and B at paths $|i\rangle_A$, $|j\rangle_B$ respectively. If the time window of the coincidence counter T satisfies $T < \Delta_{ij}/c$ (c is the velocity of the light), only photons with location modes $|i\rangle_A\,|i\rangle_B$ are registered by the coincidence counter, and density matrix ρ_0 is reduced to

$$\rho = \frac{1}{F}\sum_{i=1}^{4} p_{ii}\,|\psi_i\rangle\langle\psi_i|\,, \qquad (4)$$

where $F = \sum_{i=1}^{4} p_{ii}$ is the successful probability of generating the mixed state ρ.

Denote $p_i = p_{ii}/F$, the remaining problem is to find the optimal successful probability F. For a given density matrix of a mixed state, there are several choices of $|\psi_i\rangle$ (to be realized using different local operation and different initial entangled states) and thus also different beamsplitter settings. The best choice is the one where the success probability is maximized. From Fig.1, we find $p_{11} = \eta_1\eta_2\eta_3\eta_5$, $p_{22} = \eta_1\eta_2\,(1-\eta_3)\,(1-\eta_5)$, $p_{33} = (1-\eta_1)\,(1-\eta_2)\,\eta_4\eta_6$, and $p_{44} = (1-\eta_1)\,(1-\eta_2)\,(1-\eta_4)\,(1-\eta_6)$. Assume $p_1 \geq p_2 \geq p_3 \geq p_4$, $p_1 > 0$, and $A_i = p_i/p_1$, the optimal values of F can be obtained using Lagrangian Multipliers and the results are classified as

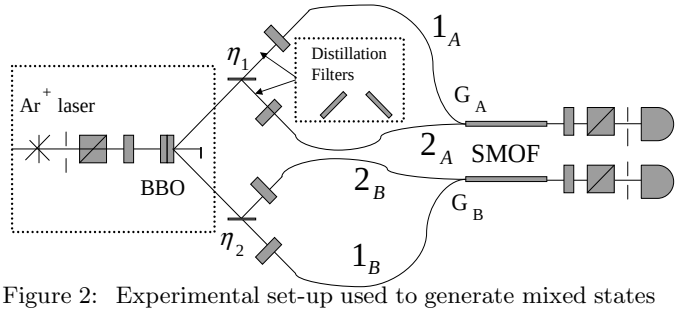

Figure 2: Experimental set-up used to generate mixed states $\rho = p\,|\psi\rangle\langle\psi| + (1-p)\,|\phi\rangle\langle\phi|$.

1. If $A_i > 0$ for $i = 2, 3$, then $\eta_1 = \eta_2 = \left(1+\sqrt{A_2}\right)/\left(\sum_{i=1}^{4}\sqrt{A_i}\right)$, $\eta_3 = \eta_5 = 1/\left(1+\sqrt{A_2}\right)$, $\eta_4 = \eta_6 = \sqrt{A_3}/\left(\sqrt{A_3}+\sqrt{A_4}\right)$, and $F_{optimal} = \left(\sum_{i=1}^{4} A_i\right)/\left(\sum_{i=1}^{4}\sqrt{A_i}\right)^2$.

2. If $A_2 > 0$, $A_3 = A_4 = 0$, then $\eta_1 = \eta_2 = \eta_4 = \eta_6 = 1$, $\eta_3 = \eta_5 = 1/\left(1+\sqrt{A_2}\right)$, and $F_{optimal} = \left(1+A_2\right)/\left(1+\sqrt{A_2}\right)^2$.

3. If $A_2 = A_3 = A_4 = 0$, then $\eta_i = 1$, and $F_{optimal} = 1$.

So far we have described a scheme for preparing an arbitrary polarization-entangled mixed state of two photons using variable beam splitters and single mode optical fibres. In practical quantum information process, we often use a special set of mixed states with the form $\rho = p\,|\psi\rangle\langle\psi| + (1-p)\,|\phi\rangle\langle\phi|$, where $0 \leq p \leq 1$ and $|\psi\rangle$, $|\phi\rangle$ are arbitrary two-qubit pure states. Our scheme can be simplified for this special mixed state. Assume $|\psi\rangle = U_1 \otimes V_1\,|\Phi(\alpha)\rangle$, $|\phi\rangle = U_2 \otimes V_2\,|\Phi(\beta)\rangle$ with $|\Phi(\theta)\rangle = (\cos\theta\,|HH\rangle + \sin\theta\,|VV\rangle)$, and $0 \leq \beta \leq \alpha \leq \pi/4$, the experimental arrangement may be described by the schematic in Fig. 2.

In Fig.2, VBS and SMOF perform same operations as those in Fig.1. The distillation filters are used for entanglement transformation [4] that is performed on location $|1\rangle_A$ or $|2\rangle_A$, depending on the initial state ($|1\rangle_A$ corresponds to transformation $|\Phi(\beta)\rangle \rightarrow |\Phi(\alpha)\rangle$ and $|2\rangle_A$ to $|\Phi(\alpha)\rangle \rightarrow |\Phi(\beta)\rangle$). The decoherence process yields dif-

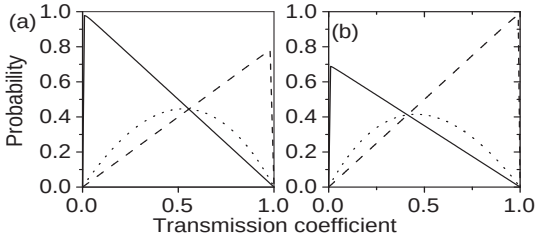

Figure 3: The final successful probabilities P (a) , P' (b) versue transmission coefficient η_1. $A = 10000$ (solid), $A = 1$ (dot), $A = 0.0001$ (dash). (a) $k_1 = 0.8$; (b) $k_2 = 0.7$.

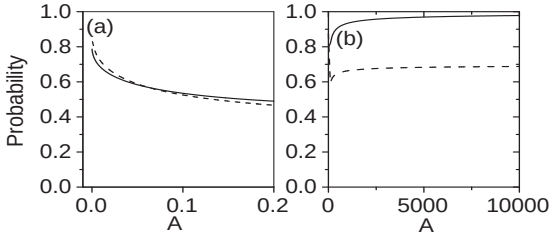

Figure 4: The final successful probabilities P (soild), P' (dash) versue the ratio A. $k_1 = 0.8$, $k_2 = 0.7$. (a) $0 \leq A \leq 0.2$; (b) $0 \leq A \leq 10000$.

ferent final states for different initial states $|\Phi(\beta)\rangle$ and $|\Phi(\alpha)\rangle$,

$$\rho = \frac{1}{P}\left(k_1\eta_1\eta_2 |\psi\rangle\langle\psi| + (1-\eta_1)(1-\eta_2)|\phi\rangle\langle\phi|\right), \quad (5)$$
$$\rho' = \frac{1}{P'}\left(\eta_1\eta_2 |\psi\rangle\langle\psi| + k_2(1-\eta_1)(1-\eta_2)|\phi\rangle\langle\phi|\right),$$

where $k_1 = \sin^2\beta/\sin^2\alpha$ ($k_2 = \cos^2\alpha/\cos^2\beta$) [20, 21] is the maximally feasible transformation probability in experiment from $|\Phi(\beta)\rangle$ to $|\Phi(\alpha)\rangle$ (from $|\Phi(\alpha)\rangle$ to $|\Phi(\beta)\rangle$), $P = k_1\eta_1\eta_2 + (1-\eta_1)(1-\eta_2)$ and $P' = \eta_1\eta_2 + k_2(1-\eta_1)(1-\eta_2)$ are the successful probabilities to obtain ρ and ρ'. The transmission coefficients $\sqrt{\eta_1}$ and $\sqrt{\eta_2}$ satisfy conditions $(1-\eta_1)(1-\eta_2) = Ak_1\eta_1\eta_2$ for ρ and $k_2(1-\eta_1)(1-\eta_2) = A\eta_1\eta_2$ for ρ', where $A = (1-p)/p$. The optimization of P and P' yields that

$$P = k_1(1+A)/\left(1+\sqrt{Ak_1}\right)^2, \quad (6)$$
$$P' = k_2(1+A)/\left(\sqrt{k_2}+\sqrt{A}\right)^2,$$

with $\eta_1 = \eta_2 = 1/\left(1+\sqrt{Ak_1}\right)$ for ρ and $\eta_1 = \eta_2 = \sqrt{k_2}/\left(\sqrt{k_2}+\sqrt{A}\right)$ for ρ'. Direct comparison between P and P' shows that if $0 \leq p \leq \frac{k_1\left(1-\sqrt{k_2}\right)^2}{k_1\left(1-\sqrt{k_2}\right)^2+k_2\left(1-\sqrt{k_1}\right)^2}$, then $P' \leq P$ and $|\Phi(\beta)\rangle$ is chosen as initial state. Otherwise $P \leq P'$ and $|\Phi(\alpha)\rangle$ is used.

In Fig.3, we plot the successful probabilities P, P' with respect to the transmission coefficient η_1. The probability P (P') reaches the maximum at certain η_1, as predicted by Eq.(6). We notice that there exist fixed points $(\eta_1, P) = (1/(1+k_1), k_1/(1+k_1))$ and $(\eta_1, P') = (k_2/(1+k_2), k_2/(1+k_2))$ for arbitrary parameter A. If the transmission coefficient η_1 is selected at those points, the final successful probabilities P, P' are constants, independent of the ratio of two components $|\psi\rangle$ and $|\phi\rangle$.

In Fig.4, we plot the optimal probabilities P, P' with respect to the parameters A. As predicted by Eq.(6), $P \to k_1$, $P' \to 1$ as $A \to 0$; while $P \to 1$, $P' \to k_2$ as $A \to \infty$. These two cases correspond to pure final state ρ. We also notice that there exist minimum values of P (P') at $A = k_1(1/k_2)$.

Fig.5 shows the change of success probability $P(P')$ as β increases from 0 to α. If $A \leq 1$, P is always less than P' for any β and initial state $|\Phi(\alpha)\rangle$ is always used; while for $A > 1$, $|\Phi(\beta)\rangle$ may be used for large β.

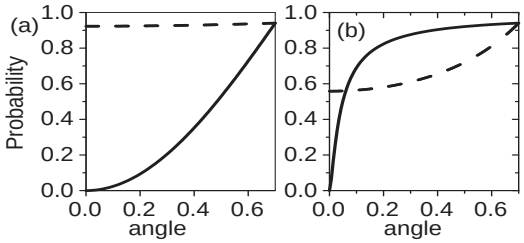

Figure 5: The final successful probabilities P (solid), P' (dash) versue the angle β. $\alpha = 0.7$. (a) $A = 0.001$; (b) $A = 1000$.

In conclusion, we have described an experimental scheme for producing an arbitrary polarization-entangled mixed state of two photons via controlled location decoherence. The scheme uses only linear optical devices and single-mode optical fibers and may be feasible within current optical technology. We believe the scheme may provide a useful mixed state entanglement source in the exploration of various quantum information processing.

[1] C. H. Bennett *et al.*, Phys. Rev. Lett. **70**, 1895 (1993).
[2] C. H. Bennett and S. J. Wiesner, Phys. Rev. Lett. **69**, 2881 (1992).
[3] D. Gottesman, e-print quant-ph/0004072.
[4] P. G. Kwiat *et al.*, Nature **409**, 1014 (2001).
[5] J.-W. Pan *et al.*, Nature **410**, 1067 (2001).
[6] W. J. Munro, *et al.*, Phys. Rev. A **64**, 030302 (2001).
[7] R. T. Thew and W. J. Munro Phys. Rev. A **64**, 022320 (2001).
[8] J. Bouda and V. Buzek, Phys. Rev. A **65**, 034304 (2002).
[9] R. Cleve *et al.*, Phys. Rev. Lett. **83**, 648 (1999).
[10] G. Bowen and S. Bose, Phys. Rev. Lett. **87**, 267901 (2001).
[11] F. Verstraete and H. Verschelde, Phys. Rev. Lett. **90**, 097901 (2003).
[12] P. G. Kwiat *et al.*, Science **290**, 498 (2000); A. J. Berglund, quant-ph/0010001.
[13] Y.-S. Zhang *et al.*, Phys. Rev. A **66**, 062315 (2002).
[14] W. K. Wootters, Phys. Rev. Lett. **80**, 2245 (1998).
[15] M. A. Nielsen, Phys. Rev. Lett. **83**, 436 (1999).
[16] P. G. Kwiat *et al.*, Phys. Rev. Lett. **75**, 4337 (1995); Phys. Rev. A **60**, 773(R) (1999).
[17] A. G. White *et al.*, Phys. Rev. Lett. **83**, 3103 (1999).
[18] W. Tittel *et al.*, Phys. Rev. Lett. **81**, 3563 (1998).
[19] M. Reck *et al.*, Phys. Rev. Lett. **73**, 58 (1994).
[20] C. Zhang, quant-ph/0104054.
[21] G. Vidal, Phys. Rev. Lett. **83**, 1046 (1999).